Simple
Installation

Strong,
Stable Grip

HATCHGRIP®

HORIZONTAL GRAB BARS FOR SAFER ROOF ACCESS

HatchGrip® provides ladder rung continuation grips that extend beyond your hatch opening. These horizontal rungs ensure a firm, stable grip for employees entering and exiting a roof hatch. Simply mount HatchGrip to the exterior of your existing roof hatch to provide employees with a safe and easy rooftop transition. HatchGrip is not intended to act as a barrier for guarding your rooftop opening. For a fall protection solution, see the PS Access Solutions™ HatchSafe® product.

IMPROVES ROOF ACCESS SAFETY

• Provides a firm, stable grip for employees when accessing the roof

• Features a gray powder coat, non-slip finish that's safe and durable

SIMPLE TO INSTALL AND EASY TO USE

• Easily installed using only a few small tools

• Bolts to roof hatch curb with gasketed connection

• Adjustable to fit hatch sizes with up to 36" wide curb

• Provides variable height adjustments for proper grip spacing

Ask About Our Other Roof Access Products:

HatchSafe®

Slidewise™ Roof Hatch

HatchGrip® also sold under the PS Safety Access™ division.

STANDARD TECHNICAL DATA

MATERIAL:
- Support brackets: Provides two (2) per set. Fits curb width up to 36". Custom sizing and design available.

- Grab-bar assembly: Provides two (2) per set.

- Backer plates: Provides six (6) per set.

- Adhesive-backed EPDM rubber gasket: Provided at bolt anchoring locations.
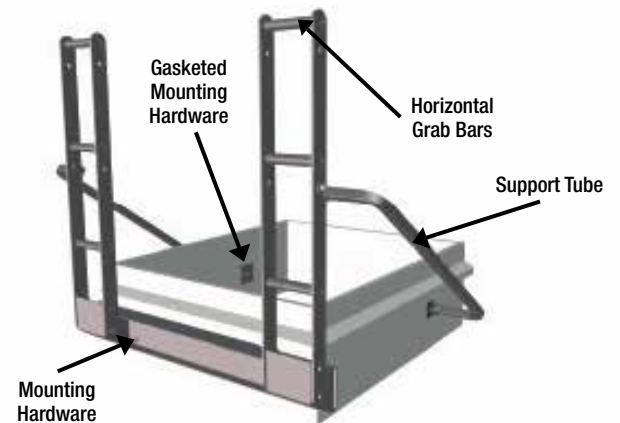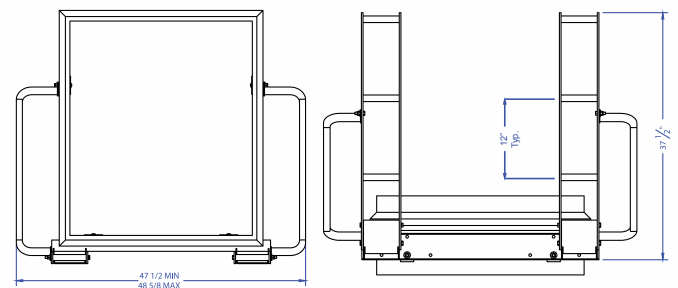
FINISH:
- Non-skid gray powder coat.

HARDWARE:
- Bolts to be 3/8" carriage head bolts with nylon-lined locking nuts sized to their function and requirement. Fasteners to be zinc-plated.

INSTALLATION:
- Ships knocked-down for easy handling and transportation to installation site.

- Adjustable to properly fit roof hatch curbing irregularities; attaches to existing curb (see measuring guide).

- Bolted into existing hatch curb.

Gasketed Mounting Hardware

Horizontal Grab Bars

Support Tube

Mounting Hardware

Installation Steps:

Anchor curb assembly

Attach vertical rungs

Support Tube Legs

Determine support tube configuration

5 3/4"

6 7/8"

Fasten support tube rail to this hole in vertical rung assembly.

3" sq. crush plate (Interior mounted)

Apply EPDM to backside of tab

Field Locate

Attach support tubes

PS DOORS

MADE IN USA